

Pneumatic pumps for the use in long distance dispensing lines or for high pressure lubrication.

Grease

100:1



For 16 kg – pails

Art.no. **4019**



For 18/25 kg – pails

Art.no. **4021**



For 50 kg – drums

Art.no. **4061**




For 180 kg – drums

Art.no. **4081**

See accessories on pages 32-37!

Art. no.	4019	4021	4061	4081
Compressed air supply	Pressure min 2 - max 8 bar (30 - 120 psi)			
Compression ratio	100:1			
Outlet pressure	800 bar (11600 psi)			
Delivery	2700 g/min			
Connection compressed air	1/4" BSP (F)			
Connection lubricant outlet	1/4" BSP (M)			
Max air consumption with 8 bar pressure	110 l/min			
Length suction tube	335 mm	450 mm	750 mm	950 mm
Diameter suction tube	28 mm			
Dimensions LxWxH (mm)	95x95x690	95x95x780	95x95x1005	95x95x1250
Suitable for pails / drums of	16 kg	18 - 25 kg	50 kg	180 kg
Weight	3.8 kg	4.2 kg	5 kg	5.6 kg

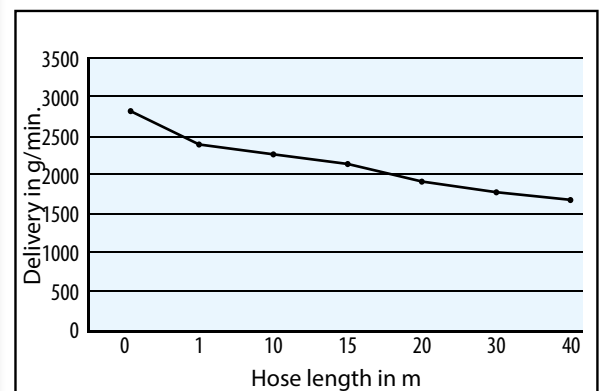

The a. m. performance values are based upon the following test conditions: lithium grease NLGI 0 at 22°C -- Compressed air pressure 8 bar -- free flow outlet 1/2".