

Pneumatic oil pumps with double compressed air outlet distributor, assuring higher delivery rates compared to the standard versions.

## TWDE SERIES

3:1



Double acting - 28 l/min

Art.no. **2030 TWDE**



Double acting - 28 l/min

Art.no. **2020 TWDE**



Double acting - 22 l/min

Art.no. **2035 TWDE**

5:1



Double acting - 22 l/min

Art.no. **2025 TWDE**




Single acting - 17 l/min

Art.no. **2075/L TWDE**

See accessories on pages 49-51 and 62-71!

| Art. no.                                    | 2020TWDE                                  | 2030TWDE   | 2025TWDE         | 2035TWDE   | 2075/L TWDE |
|---------------------------------------------|-------------------------------------------|------------|------------------|------------|-------------|
| Compressed air supply                       | Pressure min 2 - max 8 bar (30 - 120 psi) |            |                  |            |             |
| Rapporto compressione                       | 3:1                                       |            | 5:1              |            |             |
| Pressione di uscita                         | 24 bar (350 psi)                          |            | 40 bar (580 psi) |            |             |
| Delivery                                    | 28 l/min                                  |            | 22 l/min         |            | 17 l/min    |
| Connection compressed air                   | 1/4" BSP (F)                              |            |                  |            |             |
| Connection lubricant outlet                 | 1/2" BSP (M)                              |            |                  |            |             |
| Max air consumption with 8 bar pressure max | 230 l/min                                 |            | 260 l/min        |            | 230 l/min   |
| Length suction tube                         | 950 mm                                    | 650 mm     | 950 mm           | 650 mm     | 950 mm      |
| Diameter suction tube                       | 40 mm                                     |            |                  |            |             |
| Suitable for drums of                       | 208 l                                     | 60 l       | 208 l            | 60 l       | 208 l       |
| Weight                                      | 5.5 kg                                    | 5 kg       | 5.7 kg           | 5.3 kg     | 4 kg        |
| Dimensions (LxWxH) (mm)                     | 95x95x1270                                | 95x95x1070 | 95x95x1270       | 95x95x1070 | 95x95x1270  |

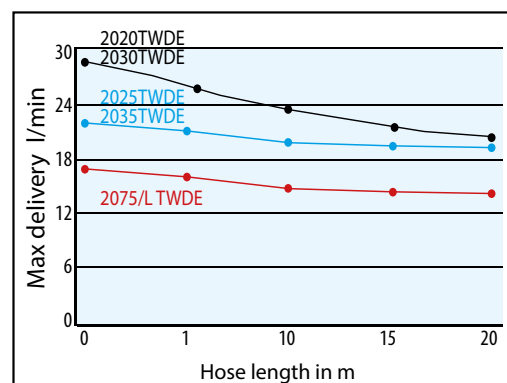

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.