

Pneumatic pumps for the supply of medium and high viscosity oils for the use in mobile kits or in pipeworks.

TAPIR SERIES

6:1

2:1

5:1

5:1

6:1



Double acting - 32 l/min

Art.no. 2012



Double acting - 48 l/min


Art.no. 2013



Double acting - 18 l/min

Art.no. 2015

Double acting - 18 l/min

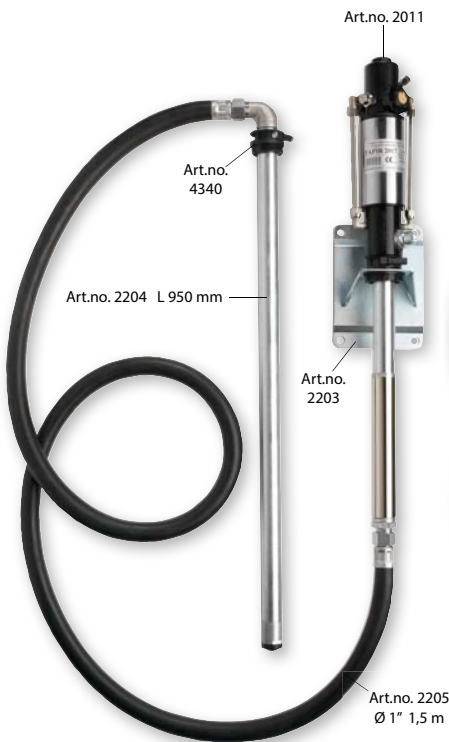

Art.no. 2014


Double acting - 32 l/min



Art.no. 2016

See accessories on pages 49-51 and 62-71!

Art. no.	2011	2012	2013	2014	2015	2016	2017
Compressed air supply	Pressure min 2 - max 8 bar (30 - 120 psi)						
Compression ratio	5:1	6:1	2:1	5:1		6:1	
Outlet pressure	40 bar (580 psi)	48 bar (700 psi)	16 bar (232 psi)	40 bar (580 psi)		48 bar (700 psi)	
Delivery	18 l/min	32 l/min	48 l/min	18 l/min		32 l/min	
Connection compressed air	1/4" BSP (F)	1/2" BSP (F)		1/4" BSP (F)		1/2" BSP (F)	
Connection lubricant outlet	3/4" BSP (M)						
Max air consumption with 8 bar pressure	220 l/min	260 l/min		220 l/min		260 l/min	260 l/min
Length suction tube	380 mm	950 mm					240 mm
Diameter suction tube	-	40 mm	55 mm	40 mm			
Suitable for drums of	Any	208 l					Any
Weight	7.5 kg	11 kg	8.5 kg	9.2 kg	8.2 kg	12.5 kg	7.8 kg
Dimensions (LxWxH) (mm)	95x95x780	95x95x1270		95x95x1500	95x95x1270	95x95x1500	95x95x700

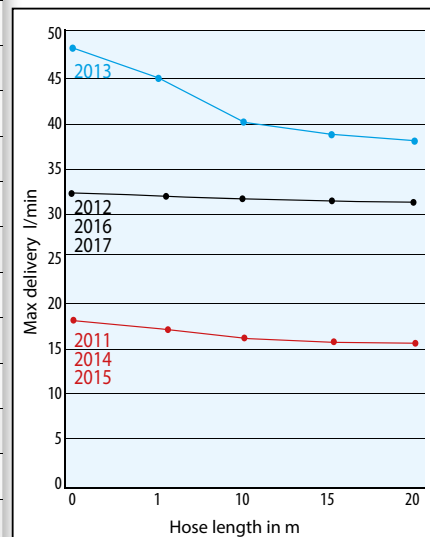

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.