

Heavy duty pneumatic pumps, industrial pump series "Power Bull", designed for the supply of oil under demanding conditions. Particularly suitable for the oil distribution in pipeworks and installations where a simultaneous supply of oil is required on different dispensing points at high pressure and/or with a high delivery.

POWER BULL SERIES

Oil




Single acting - Delivery 27 l/min

Art.no. 2057




Single acting - Delivery 15 l/min

Art.no. 2058

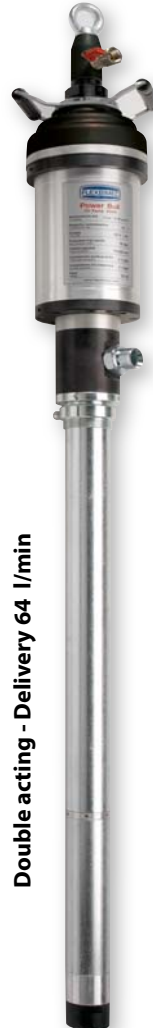

Double acting - Delivery 64 l/min

Art.no. 2088

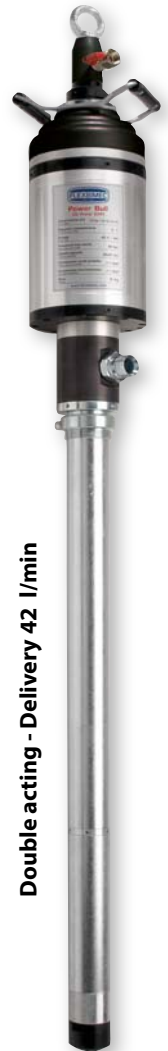


Double acting - Delivery 42 l/min

Art.no. 2091

See accessories on pages 49-51 and 62-71!

Art. no.	2057	2058	2088	2091
Compressed air supply	Pressure min 2 - max 8 bar (30 - 120 psi)			
Compression ratio	10:1	16:1	4:1	6:1
Delivery	27 l/min	15 l/min	64 l/min	42 l/min
Outlet pressure	80 bar (1160 psi)	128 bar (1860 psi)	32 bar (465 psi)	48 bar (700 psi)
Max frequency strokes/min	150	120	150	120
Max air consumption with 8 bar pressure	2.05 m ³ /min	1.92 m ³ /min	2.05 m ³ /min	1.92 m ³ /min
Diameter pneumatic piston	100 mm	125 mm	100 mm	125 mm
Diameter suction tube	50 x 40 mm	50 x 40 mm	55 x 50 mm	55 x 50 mm
Connection lubricant outlet	1" BSP (M)			
Connection compressed air	1/2" BSP (F)			
Application	Drum mounted pump			
Weight	15 kg	16 kg	16 kg	17 kg
Dimensions (LxWxH) (mm)	158x160x1600			

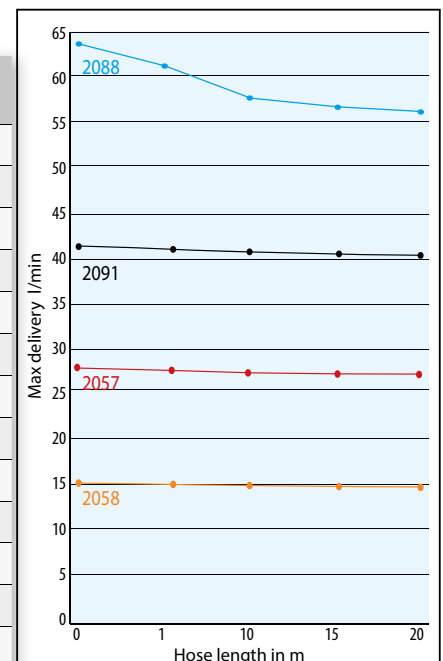

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.