


Pneumatic pumps for the transfer of grease or high viscosity oils at a constant pressure.

**10:1**

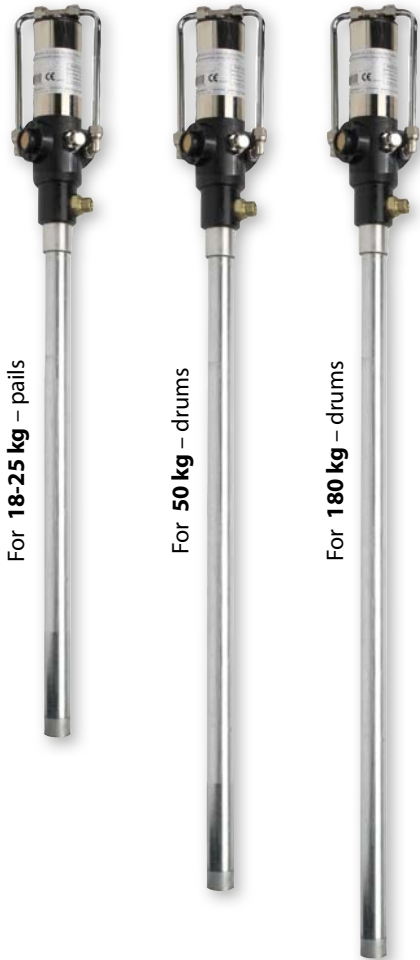

For 18-25 kg – pails

For 50 kg – drums


For 180 kg – drums

Art.no.  
**4043/20**

Art.no.  
**4043/60**

Art.no.  
**4043/180**

**25:1**

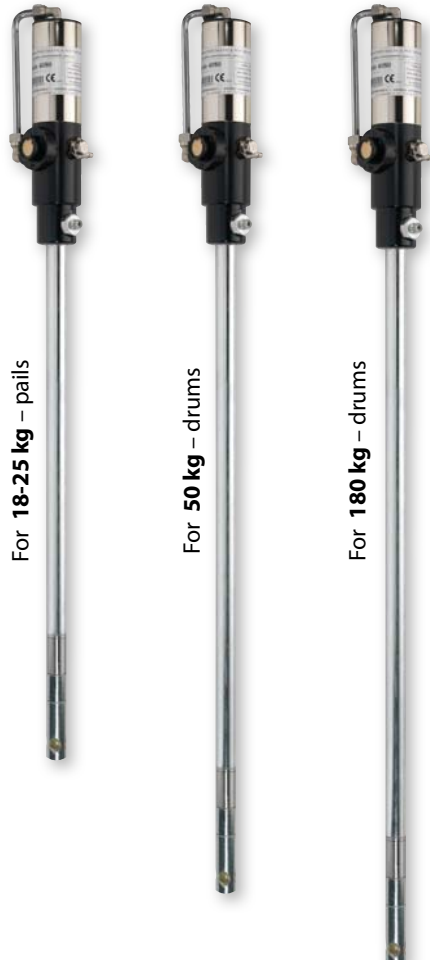

For 18-25 kg – pails

For 50 kg – drums

For 180 kg – drums

Art.no.  
**4022**

Art.no.  
**4062**

Art.no.  
**4082**

**45:1**



For 18-25 kg – pails

For 50 kg – drums

For 180 kg – drums




Art.no.  
**4083/20**

Art.no.  
**4083/60**

Art.no.  
**4083/180**

See accessories on pages 32-37!

Art. no.	4043/20	4043/60	4043/180	4022	4062	4082	4083/20	4083/60	4083/180
Compressed air supply	Pressure min 2 - max 8 bar (30 - 120 psi)			Pressure min 2 - max 8 bar (30 - 120 psi)			Pressure min 2 - max 8 bar (30 - 120 psi)		
Compression ratio	10:1			25:1			45:1		
Outlet pressure	80 bar (1200 psi)			200 bar (2900 psi)			360 bar (5200 psi)		
Delivery	6000 g/min			4000 g/min			3800 g/min		
Connection compressed air	1/4" BSP (F)			1/4" BSP (F)			1/4" BSP (F)		
Connection lubricant outlet	1/2" BSP (M)			1/2" BSP (M)			1/2" BSP (M)		
Max air consumption with 8 bar pressure	165 l/min			78 l/min			165 l/min		
Length suction tube	450 mm	750 mm	950 mm	450 mm	750 mm	950 mm	450 mm	750 mm	950 mm
Diameter suction tube	33 mm			28 mm			28 mm		
Dimensions LxWxH (mm)	95x95x690	95x95x780	95x95x1005	95x95x690	95x95x780	95x95x1005	95x95x690	95x95x780	95x95x1005
Suitable for pails / drums of	18 - 25 kg	50 kg	180 kg	18 - 25 kg	50 kg	180 kg	18 - 25 kg	50 kg	180 kg
Weight	4.5 kg	5.3 kg	5.7 kg	4.2 kg	5 kg	5.6 kg	4.4 kg	5.2 kg	5.8 kg

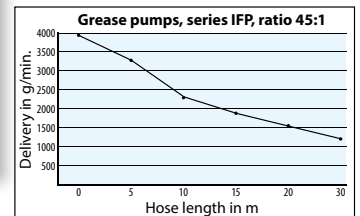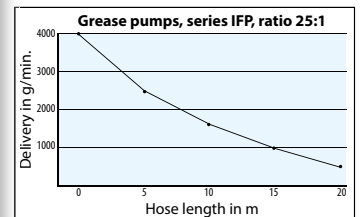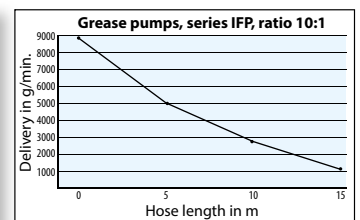

The a. m. performance values are based upon the following test conditions: lithium grease NLGI 0 at 22°C – Compressed air pressure 8 bar – free flow outlet 1/2".