

Art.no. **6561**

Pneumatic, selfpriming rotary vane pump for the transfer of petrol, with body in cast iron with anticorrosive coating and plastic rotor. On demand the pump can be supplied with an earth cable to enable an electrostatic discharge.


It is constructed in accordance with directive ATEX 2014/34/EU.



OPTIONAL




Art. no.	Compressed air supply	Max outlet pressure	Max delivery	Connection threads	Weight	Dimensions (LxWxH) (mm)
<b>6561</b>	1 – 4 bar	4 bar	35 l/min	1" BSP (F)	3 kg	140x150x190



Art.no. **6930**

Pneumatic 1:1 – piston pump, suitable for the suction and the transfer of petrol. On demand the pump can be supplied with an earth cable to enable an electrostatic discharge.


It is constructed in accordance with directive ATEX 2014/34/EU.

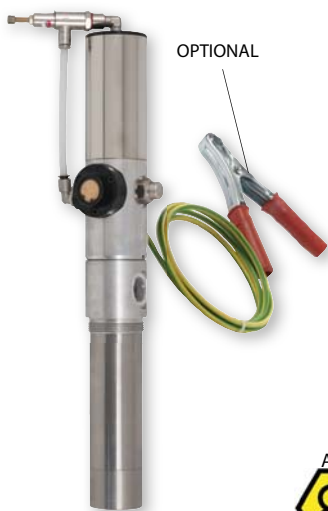

OPTIONAL



Art. no.	Compressed air supply	Max outlet pressure	Max delivery	Connection threads	Weight	Dimensions (LxWxH) (mm)
<b>6930</b>	2 – 6 bar	6 bar	25 l/min	3/4" BSP (F)	8 kg	530x120x90



Art.no. **6931**

Electric, selfpriming 12 VDC – rotary vane pump (on demand also available in 230 VAC) for the transfer of petrol, with painted body in cast iron with anticorrosive coating, anti-noise filter (electromagnetic compatibility EMC), thermal protection, non-return valve, pressure relief valve, built-in bypass valve.

The pump is constructed in accordance with directive ATEX 2014/34/EU – IECEx (group II – category 2 – G Ex d IIA T4 Gb).



Art. no.	Voltage	Power	Delivery	Current drain	Connection threads	Weight	Dimensions (LxWxH) (mm)
<b>6931</b>	12 VDC	250 W	50 l/min	21 A	1" BSP (F)	7 kg	195x355x270

